

Verso S 1300 F C5

Maximum air flow, m ³ /h	1350
Maximum air flow, l/s	375
Electric power input of the fan drive at maximum flow rate, W	236
Filters dimensions BxHxL, mm	558x287x46
Unit dimensions BxHxL, mm	700x350x893
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	46



Acoustic data

A-weighted sound power level L_{wa} , dB(A)
at nominal flow rate

Supply inlet	76
Supply outlet	81
Casing	58

A-weighted sound pressure level L_{pa} , dB(A)

10 m² normally isolated room, distance from casing – 3 m.

Surroundings	47
--------------	----


Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 1300 F-HE/9	3~400	9,0	15,4	19,5
Verso S 1300 F-HE/15	3~400	15,0	24,1	32,5
Verso S 1300 F-HW	1~230	–	2,7	–

Hot water air heater



Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	10,7	8,9	7
Flow rate, dm ³ /h	471	389	303
Pressure drop, kPa	1,9	1,4	1
Temperature in/out, °C	-5 / 18,6	-5 / 14,6	-5,0 / 10,3
Maximal capacity, kW	10,7	8,9	7
Connection, "	½		

Performance

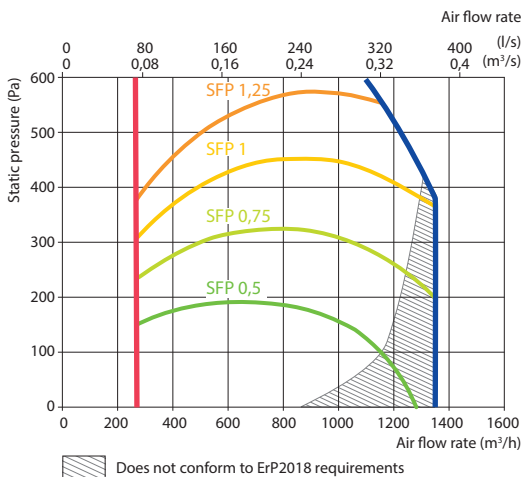


Accessories

Closing damper	SRU-M-500x200+LF24/LM24
Silencer	ODA STS-IAHJBU-500-200-900-S
	SUP STS-IAHJBU-500-200-1200-S
PPU	PPU-HW-3R-15-2.5-W2
Water cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8140

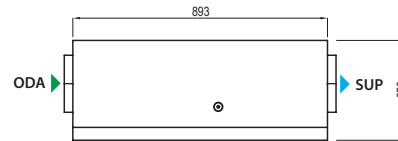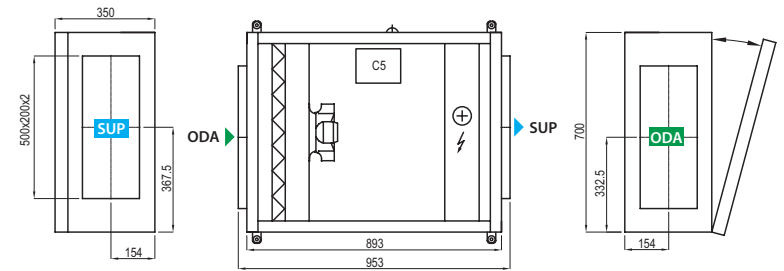

Mounting positions



▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air